

PRODUCT CLASS

Type C



AB03 ECO-TWISTER


SMART PACK

AB01
LIGHT TECH

CORE : Polyester HT

COVER : Polyester HT

ANIMA : POLIESTER HT

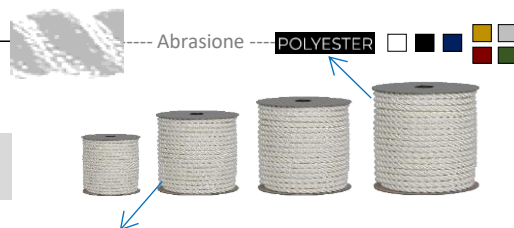

COVER MIX TECNICO : ASSENTE

FIBER CHARACTERISTICS


The fiber's components of this product are : POLYESTER HT

- **Polyester** it's polymers produced by mixing ethylene glycol and terephthalic acid.




FIBER'S PROPERTY	UDM	POLYESTER HT	-	-	-
Tenacity	gr/den	9,3	-	-	-
Specific gravity	gr/cm ³	1,38	-	-	-
Elongation at break	%	14,6	-	-	-
Tensile modulus	gr/den	120	-	-	-
Melting point	°C	256	-	-	-

CORE



POLYESTERE SPUN

COVER



POLYESTERE HT



BRAID CHARACTERISTICS

CORE			COVER (it's a media of the of all fiber's components)		
Tenacity	9,3	gr/den	Abrasion resistance	-	gr/den
Creep	10	%	Peack of temp.	-	°C
Module	120	gr/den	Grip	-	frict. coeff.
Weight	1,38	gr/cm ³	Weight	-	gr/cm ³

DISCOUNT SYSTEM

SHOP		WHOLESALE	
Standard lenght sc.	%	Standard lenght sc.	%
-	-	-	-
-	-	-	-

APPLICATIONS , TECHNICAL DATA , PRICE

- Multiuse line



Ø	weight	breacking load	standard lenght	custom lenght	Ø	white	black	-	-
mm	gr/mt	daN	mt	mt	mm	€/mt	€/mt	-	-
Ø 6 X mt 20	28,0	315	20	-	Ø 6 X mt 20	8,23 €	9,05 €		
Ø 6 X mt 30	28,0	315	30	-	Ø 6 X mt 30	11,03 €	12,12 €		
Ø 6 X mt 40	28,0	315	40	-	Ø 6 X mt 40	13,88 €	15,25 €		
Ø 6 X mt 50	28,0	315	50	-	Ø 6 X mt 50	16,17 €	17,77 €		
Ø 8 X mt 20	41,0	640	20	-	Ø 8 X mt 20	10,95 €	12,05 €		
Ø 8 X mt 30	41,0	640	30	-	Ø 8 X mt 30	14,67 €	16,14 €		
Ø 8 X mt 40	41,0	640	40	-	Ø 8 X mt 40	18,46 €	20,32 €		
Ø 8 X mt 50	41,0	640	50	-	Ø 8 X mt 50	21,51 €	23,68 €		
Ø 10 X mt 20	69,0	1.230	20	-	Ø 10 X mt 20	16,58 €	18,24 €		
Ø 10 X mt 30	69,0	1.230	30	-	Ø 10 X mt 30	22,20 €	24,43 €		
Ø 10 X mt 40	69,0	1.230	40	-	Ø 10 X mt 40	27,94 €	30,74 €		
Ø 10 X mt 50	69,0	1.230	50	-	Ø 10 X mt 50	32,56 €	35,82 €		
Ø 12 X mt 20	95,0	1.360	20	-	Ø 12 X mt 20	22,82 €	25,11 €		
Ø 12 X mt 30	95,0	1.360	30	-	Ø 12 X mt 30	30,57 €	33,63 €		
Ø 12 X mt 40	95,0	1.360	40	-	Ø 12 X mt 40	38,47 €	42,33 €		
Ø 12 X mt 50	95,0	1.360	50	-	Ø 12 X mt 50	44,83 €	49,32 €		

Shock absobtion at 50% of breacking load.... 15,00%

* Linear breaking load in according to DIN EN ISO 2307