

PRODUCT CLASS

Type C



AB03 TWISTER


SMART PACK

AB01
LIGHT TECH

CORE : Polyester HT


COVER : Polyester HT

ANIMA : POLIESTER HT



Abrasione

POLYESTER

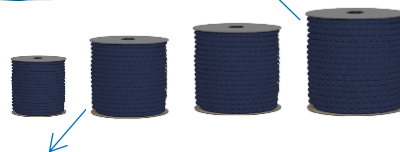

COVER MIX TECNICO : ASSENTE

FIBER CHARACTERISTICS


The fiber's components of this product are : POLYESTER HT

- **Polyester** it's polymers produced by mixing ethylene glycol and terephthalic acid.




FIBER'S PROPERTY	UDM	POLYESTER HT	-	-	-
Tenacity	gr/den	9,3	-	-	-
Specific gravity	gr/cm ³	1,38	-	-	-
Elongation at break	%	14,6	-	-	-
Tensile modulus	gr/den	120	-	-	-
Melting point	°C	256	-	-	-

CORE



POLYESTERE SPUN

COVER



POLYESTERE HT



BRAID CHARACTERISTICS

CORE			COVER (it's a media of the of all fiber's components)		
Tenacity	9,3	gr/den	Abrasion resistance	-	gr/den
Creep	10	%	Peack of temp.	-	°C
Module	120	gr/den	Grip	-	frict. coeff.
Weight	1,38	gr/cm ³	Weight	-	gr/cm ³

DISCOUNT SYSTEM

SHOP		WHOLESALE	
Standard lenght	sc. %	Standard lenght	sc. %
-	-	-	-
-	-	-	-

APPLICATIONS , TECHNICAL DATA , PRICE

- Multiuse line



Ø	weight	breacking load	standard lenght	custom lenght	Ø	white	black	blu navy	colors
mm	gr/mt	daN	mt	mt	mm	€/mt	€/mt	€/mt	€/mt
Ø 6 X mt 20	28,0	752	20	-	Ø 6 X mt 20	10,95 €	12,05 €	14,79 €	15,55 €
Ø 6 X mt 30	28,0	752	30	-	Ø 6 X mt 30	14,67 €	16,14 €	19,80 €	20,83 €
Ø 6 X mt 40	28,0	752	40	-	Ø 6 X mt 40	18,46 €	20,31 €	24,93 €	26,22 €
Ø 6 X mt 50	28,0	752	50	-	Ø 6 X mt 50	21,51 €	23,67 €	29,04 €	30,55 €
Ø 8 X mt 20	41,0	1.300	20	-	Ø 8 X mt 20	14,58 €	16,04 €	19,68 €	20,70 €
Ø 8 X mt 30	41,0	1.300	30	-	Ø 8 X mt 30	19,53 €	21,48 €	26,35 €	27,72 €
Ø 8 X mt 40	41,0	1.300	40	-	Ø 8 X mt 40	24,58 €	27,03 €	33,17 €	34,89 €
Ø 8 X mt 50	41,0	1.300	50	-	Ø 8 X mt 50	28,64 €	31,50 €	38,65 €	40,66 €
Ø 10 X mt 20	69,0	1.806	20	-	Ø 10 X mt 20	22,06 €	24,27 €	29,79 €	31,34 €
Ø 10 X mt 30	69,0	1.806	30	-	Ø 10 X mt 30	29,55 €	32,50 €	39,90 €	41,97 €
Ø 10 X mt 40	69,0	1.806	40	-	Ø 10 X mt 40	37,19 €	40,91 €	50,22 €	52,83 €
Ø 10 X mt 50	69,0	1.806	50	-	Ø 10 X mt 50	43,34 €	47,67 €	58,52 €	61,55 €
Ø 12 X mt 20	95,0	2.850	20	-	Ø 12 X mt 20	30,38 €	33,41 €	41,02 €	43,15 €
Ø 12 X mt 30	95,0	2.850	30	-	Ø 12 X mt 30	40,68 €	44,75 €	54,93 €	57,78 €
Ø 12 X mt 40	95,0	2.850	40	-	Ø 12 X mt 40	51,21 €	56,32 €	69,14 €	72,73 €
Ø 12 X mt 50	95,0	2.850	50	-	Ø 12 X mt 50	59,67 €	65,63 €	80,57 €	84,75 €

Shock absobtion at 50% of breacking load.... 15,00%

* Linear breaking load in according to DIN EN ISO 2307